

MA231 (cn_en)**安装说明****PV 公电缆连接器 PV-KST4/...-UR****PV 母电缆连接器 PV-KBT4/...-UR****目录**

安全说明	2
工具要求	3
电缆准备	4
压接	4
安装检查	5
在无安全锁扣PV-SSH4的情况下插拔电缆连接器	6
有安全锁扣PV-SSH4的情况下插拔电缆连接器	6
电缆状态	7
技术参数	8

MA231 (cn_en)**Assembly instructions****PV male cable coupler PV-KST4/...-UR****PV female cable coupler PV-KBT4/...-UR****Content**

Safety Instructions	2
Tools required	3
Cable preparation	4
Crimping	4
Assembly check	5
Plugging and unplugging the cable coupler without safety lock clip PV-SSH4	6
with safety lock clip PV-SSH4	6
Cable routing	7
Technical data	8

母电缆连接器 / Female cable coupler

PV-KBT4/2.5.../PV-KBT4/6...**PV-KBT4/8II-UR**

公电缆连接器 / Male cable coupler

PV-KST4/2.5.../PV-KST4/6...**PV-KST4/8II-UR****选配件 / Optional
PV-SSH4**

安全锁扣 / Safety lock clip









(见 / see www.multi-contact.com --> MA252)


安全说明

该产品应由有相应资质或经过专家培训的、具备相关安全应用规范的专业人员安装。
MC不承担对于因不遵守这些警告而产生的任何责任。

仅可使用MC指定的零件和工具。对于自行装配，请务必遵守指定的准备和安装说明，否则MC不予保证对于产品的安全性及技术参数的一致性。对于产品请勿做任何形式的修改。

那些可与MC零件相配的，非MC原产的连接器和被制造商有时称为可与“MC兼容”的连接器，它们不符合安全的、长期稳定的电气连接要求，并且出于安全方面的考虑，不允许它们与MC零件连接。如果这些连接器（未经MC认证）与MC零件连接并产生损害，我们对此不承担任何责任。

-  此处所说明的操作不允许在带电或负载下进行。
-  终端产品必须提供电击保护（例如：通过正确安装插头连接器）
-  在负载的情况下，连接器不允许断开。在带电情况下允许插拔。
-  此产品的水密性按照IP产品特性防护等级。但是，它们不适合长期在水下使用。请勿将插头连接器直接放置在屋顶表面。
-  未插合状态的插头连接器必须带上密封盖以防防水防尘（32.0716用于插座，32.0717用于插头）。被污染的公母插头不能插合。
-  插头连接器不能承受持续的机械拉伸。电缆应该由电缆扎带固定。
-  出于安全原因，MC强烈建议，不要使用PVC导线或H07RN-F无镀锡电缆。
-  所述额定电压为最大电压值，且仅适于插头连接器。最终的额定电压须根据组件中最小的最大额定电压及相关评估、认证的标准方可确定。









 更多的技术参数请见产品目录。

Safety Instructions







The products may be assembled and installed only by suitably qualified and trained specialists with due observance of all applicable safety regulations.
Multi-Contact (MC) declines any liability in the event of failure to observe these warnings.

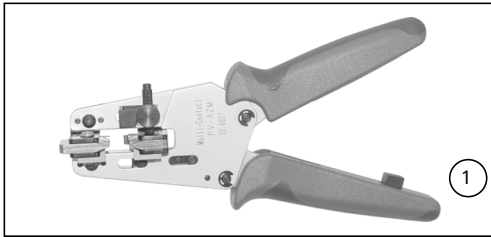
Use only the components and tools specified by MC. Do not deviate from the preparation and assembly procedures described here, since in this event, in the event of self-assembly, no guarantee can be given as to safety or conformity with the technical data. Do not modify the product in any way.

Connectors not made by MC which can be mated with MC elements and in some cases are also described as “MC-compatible” do not conform to the requirements for safe electrical connection with long-term stability, and for safety reasons must not be plugged together with MC elements. MC can therefore accept no liability for damage which occurs as a result of mating these connectors which lack MC approval with MC elements.

-  The work described here must not be carried out on live or load-carrying parts.
-  Protection from electric shock must be assured by the end product and its user.
-  The plug connections must not be disconnected under load. Plugging and unplugging when live is permitted.
-  The plug connectors are watertight in accordance with IP protection class. However, they are not suitable for continuous operation under water. Do not place the plug connectors directly on the roof membrane.
-  Unmated plug connectors must be protected from moisture and dirt with a sealing cap (MC4 Article No. 32.0716 for sockets and 32.0717 for plugs). The male and female parts must not be plugged together when soiled.
-  The plug connection must not be subjected to continuous mechanical tension. The cable should be fixed with cable binders.
-  For safety reasons MC prohibits the use of either PVC cables or untinned cables of type H07RN-F.
-  Stated voltage ratings are maximum values and pertain only to the cable couplers. The final voltage rating of a cable lead assembly or harness is dictated by the lowest maximum voltage rating of any component contained in the assembly and the relevant standards to which they have been evaluated and certified.

 For further technical data please see the product catalogue.

符号解释	Explanation of the symbols
 危险电压警告	 Warning of dangerous voltages
 危险区域警告	 Warning of a hazard area
 有用的提示	 Useful hint or tip

**工具要求****(ill. 1)**

剥线钳**PV-AZM...**包括内置刀片和六角扳手A/F 2,5 mm。

电缆截面积: 1,5/2,5/4/6 mm²
 型号: **PV-AZM-1.5/6**
 订货号: **32.6029-156**

电缆截面积: 4/6/10 mm²
 型号: **PV-AZM-4/10**
 订货号: **32.6027-410**

(ill. 2)

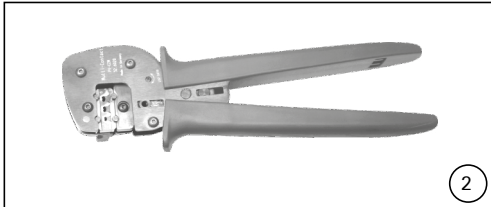
压接钳**PV-CZM...**包括定位块和内置压接芯。

压接范围:
 1,5/2,5/4 mm² (14/12 AWG)
 型号: **PV-CZM-18100**
 订货号: **32.6020-18100**

压接范围:
 2,5/4/6 mm² (12/10 AWG)
 型号: **PV-CZM-19100**
 订货号: **32.6020-19100**

压接范围: 4/10 mm² (12 AWG)
 型号: **PV-CZM-20100**
 订货号: **32.6020-20100**

压接范围 12/10/8 AWG
 型号: **PV-CZM-22100**
 订货号: **32.6020-22100**

**Tools required****(ill. 1)**

Stripping pliers **PV-AZM...** incl. built-in blade as well as hexagonal screwdriver A/F 2,5mm.

Cable cross section: 1,5/2,5/4/6 mm²
 Type: **PV-AZM-1.5/6**
 Order No. **32.6029-156**

Cable cross section: 4/6/10 mm²
 Type: **PV-AZM-4/10**
 Order No. **32.6027-410**

(ill. 2)

Crimping pliers **PV-CZM...** incl. Locator and built-in crimping insert.

Crimping range:
 1,5/2,5/4 mm² (14/12 AWG)
 Type: **PV-CZM-18100**
 Order No. **32.6020-18100**

Crimping range:
 2,5/4/6 mm² (12/10 AWG)
 Type: **PV-CZM-19100**
 Order No. **32.6020-19100**

Crimping range: 4/10 mm² (12 AWG)
 Type: **PV-CZM-20100**
 Order No. **32.6020-20100**

Crimping range: 12/10/8 AWG
 Typ: **PV-CZM-22100**
 Order No. **32.6020-22100**

**(ill. 3)**

开口扳手**PV-MS**, 1套=2片
 订货号: **32.6024**

(ill. 4)

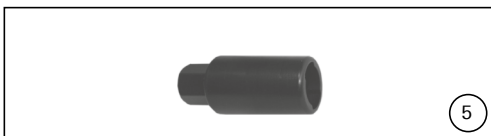
PV-WZ-AD/GWD 插座扳手用于紧固
 订货号: **32.6006**

(ill. 5)

PV-SSE-AD4 插座扳手用于锁紧
 订货号: **32.6026**

(ill. 6)

测试插头**PV-PST**
 订货号: **32.6028**

**(ill. 3)**

Open-end spanner **PV-MS**,
 1 Set = 2 pieces
 Order No. **32.6024**

(ill. 4)

PV-WZ-AD/GWD socket wrench
 insert to tighten
 Order No. **32.6006**

(ill. 5)

PV-SSE-AD4 socket wrench insert to
 secure
 Order No. **32.6026**

(ill. 6)


Test plug **PV-PST**
 Order No. **32.6028**

说明:

测试插头不可用于8 AWG电缆!

Note:

The test plug cannot be used with an 8 AWG cable!



(ill. 7)
开口扳手A/F 15 mm

(ill. 7)
Open-end spanner A/F 15 mm



(ill. 8)
扭力工具A/F 12 mm

(ill. 8)
Torque screwdriver A/F 12 mm

电缆准备

Cable preparation

能够连接等级5和6的带线束结构的电缆

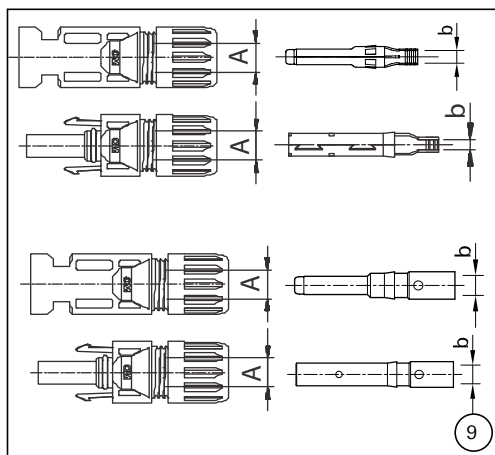
Cables with a strand construction of classes 5 and 6 can be connected.

注意:

请勿使用未镀层的或已氧化的导线，我们推荐使用镀锡的导线。所有MC光伏电缆都是高质量的镀锡导线。

Attention:

Use no uncoated or already oxidised conductors. It is recommended to use tinned conductors. All MC solar cables have high-quality, tinned conductors.



(ill. 9, 表格.1)
依照插图9和表格1，检查A和b的尺寸

(ill. 9, Tab. 1)
Check dimensions A and b in accordance with illustration 9 and table 1.

Tab. 1

导线截面积 Conductor cross section	A: Ø 电缆直径范围 mm A: Ø range of the cable mm	Type ¹⁾ Type ¹⁾	b: 控制尺寸 (mm) b: Control dimension (mm)
14 AWG / 2,5 mm ²	3,0 - 6,0	PV-K...T4/2.5I ²⁾	~ 3 mm
	6,0 - 8,9	PV-K...T4/2.5II ³⁾	
12 AWG / 4 mm ²	3,0 - 6,0	PV-K...T4/6I ²⁾	~ 5 mm
	6,0 - 8,9	PV-K...T4/6II ⁴⁾	
10 AWG / 6 mm ²	3,0 - 6,0	PV-K...T4/6I ²⁾	~ 5 mm
	6,0 - 8,9	PV-K...T4/6II ⁵⁾	
8 AWG	6,05 - 8,9	PV-K...T4/8I ⁶⁾	~ 7,2 mm
10 mm ²	5,5 - 8,9	PV-K...T4/10II ⁷⁾	~ 4,4mm

¹⁾ 1000 V TÜV: 电缆经2PFG 1169/07.08认证
1500 V TÜV: 电缆经2PFG 1990/05.12认证
UL USE2: 电缆经UL854认证并被列入TYLZ类别
UL PV-wire: 电缆经UL4703认证并被列入ZKLA类别

²⁾ 只有经过USE2或USE2与PV-wire双项认证的电缆获得了UL认证

³⁾ 通过UL PV-wire认证，未经过USE2认证，仅7-49线束、直径范围为6.05-8.2 mm的电缆获得UL认证。

⁴⁾ 通过UL PV-wire认证，未经过USE2认证，仅7-56线束、直径范围为6.05-8.2 mm的电缆获得UL认证。

⁵⁾ 通过UL PV-wire认证，未经过USE2认证，仅7-78线束、直径范围为6.05-8.2 mm的电缆获得UL认证。

⁶⁾ 仅7-168线束的UL PV-wire电缆获得UL 认证

⁷⁾ 仅通过TÜV-Rheinland认证

¹⁾ 1000 V TÜV: cables certified according to 2PFG 1169/07.08
1500 V TÜV: cables certified according to 2PFG 1990/05.12
UL USE2: cables certified according to UL854 and listed in the category TYLZ
UL PV-wire: cables certified according to UL4703 and listed in category ZKLA

²⁾ UL certified only with USE2 or USE2+PV-wire certified cable

³⁾ UL certified for UL PV-wire without USE2 certification only for 7-49 strands and Ø-range of 6,05-8,2 mm

⁴⁾ UL certified for UL PV-wire without USE2 certification only for 7-56 strands and Ø-range of 6,05-8,2 mm

⁵⁾ UL certified for UL PV-wire without USE2 certification only for 7-78 strands and Ø-range of 6,05-8,2 mm

⁶⁾ UL certified only for UL PV-wire with 7-168 strands

⁷⁾ only certified for TÜV-Rheinland

(ill. 10)
根据插图10和表格2检查L的长度

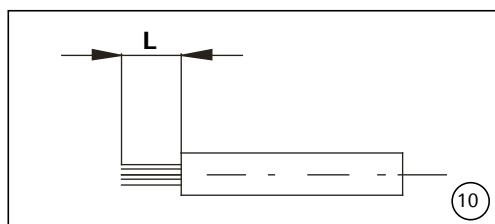
(ill. 10)
Check dimensions L accordance with illustration 10 and table 2.

注意:

在剥线时请勿切断里面的铜丝

Attention:

Do not cut individual strands at stripping



Tab. 2

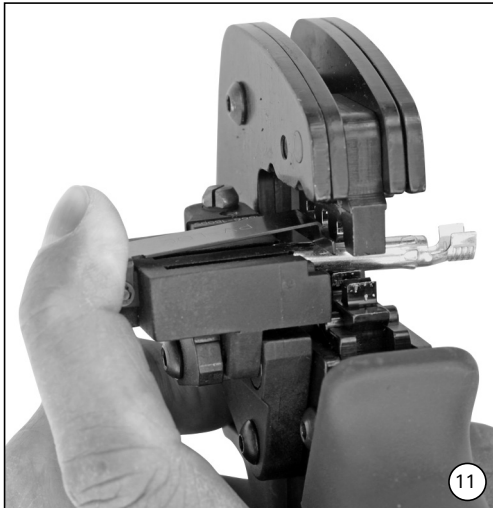
型号	长度 "L"
PV-K...T4/2,5I	6 - 7,5 mm
PV-K...T4/6I	6 - 7,5 mm
PV-K...T4/10II	6 - 7,5 mm
PV-K...T4/8II	8,5 - 10 mm

说明:

剥线钳PV-AZM...和可互换刀片的操作说明见安装说明MA267，可在www.multi-contact.com网站下载

Note:

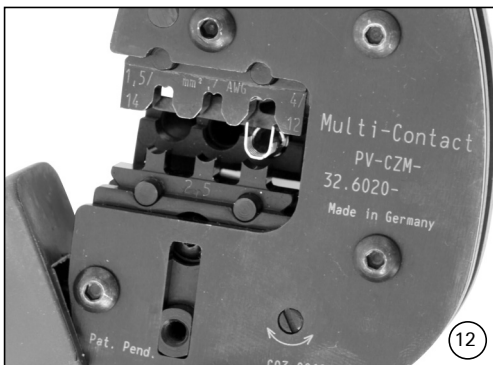
For directions on the operation of stripping pliers PV-AZM... and changing blade sets, see operating instruction MA267 at www.multi-contact.com

**压接****(ill. 11)**

打开并按住夹子 (K) .把接头放在适合的截面区域。转动接头使开口朝上，松开夹子 (K) ，接头就固定好了。

Crimping**(ill. 11)**

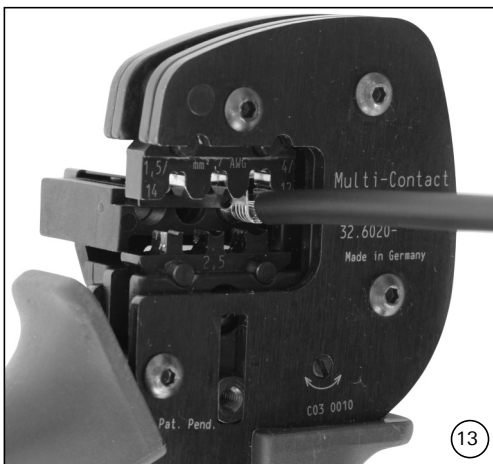
Open the clamp (K) and hold. Place the contact in the appropriate cross-section range. Turn the crimp lugs upwards. Release the clamp (K). The contact is fixed.

**(ill. 12)**

逐渐压压接钳直到接头开口完全接触到压接模。

(ill. 12)

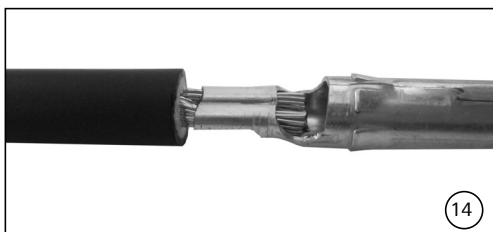
Press the pliers gently together until the crimp lugs are properly located within the crimping die.

**(ill. 13)**

插入电缆的剥线端直到电缆的绝缘层接触到压接芯。完全压紧压接钳。

(ill. 13)

Insert the stripped cable end until the insulation comes up against the crimp insert. Completely close the crimping pliers.

**(ill. 14)**

检查压接

(ill. 14)

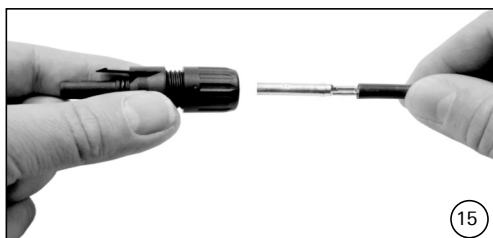
Visually check the crimp.

说明:

压接工具的操作说明见安装说明 MA251, 可在 www.multi-contact.com 网站下载

Note:

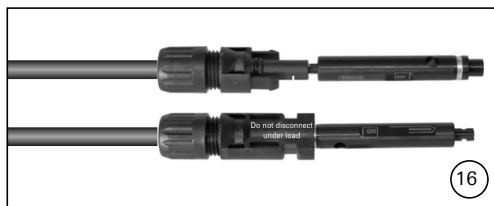
For directions on the operation of the crimping tool, please see operating instructions MA251 at www.multi-contact.com

**安装检查****(ill. 15)**

把压接好的接头插入到公连接器或母连接器的绝缘套内，直到听到滴答声说明安装到位。轻轻地拉导线检查金属件是否正确啮合。

Assembly check**(ill. 15)**

Insert the crimped-on contact into the insulator of the male or female coupler until it clicks into place. Pull gently on the lead to check that the metal part is correctly engaged.



(ill. 16)

把测试插头的合适端尽可能深的插入公连接器或母连接器中。如果接触正确，那么测试插头上的白色标识必定可见。

i 说明:

测试插头不可用于8 AWG电缆!

(ill. 16)

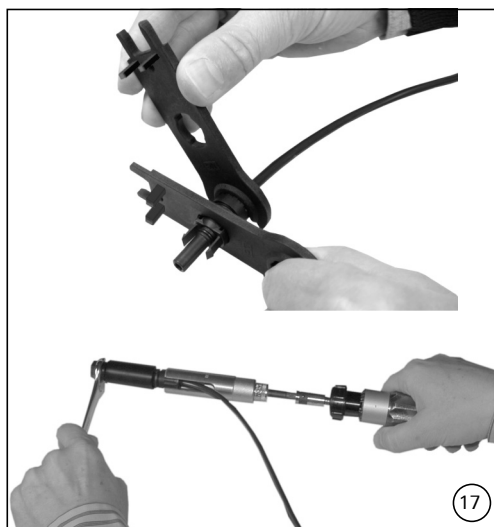
Insert the appropriate end of the test pin into the male or female coupler as far as it will go. If the contact is correctly located, the white mark on the test pin must still be visible.

i Note:

The test plug cannot be used with an 8 AWG cable!

力度不可以使塑料件的密封部分产生明显形变。
参考电缆线生产商的最小弯曲半径说明。

The forces must not create a visible deformation in the sealing portion of the insulation.
Refer to cable manufacturers specification for minimum bending radius.



(ill. 17)

用手旋紧电缆固定头，再用工具PV-MS旋紧
或
用工具PV-WZ-AD/GWD和PV-SSE-AD4旋紧电缆固定头

(ill. 17)

Screw up the cable gland hand-tight with the tools **PV-MS**
or
tighten the cable gland with the tools **PV-WZ-AD/GWD** and **PV-SSE-AD4**.

如论如何:

紧固扭矩都必须适合所用的电缆。典型的数值在3,4 Nm至3,5 Nm之间¹⁾

¹⁾ 我们建议在安装前校准扭矩扳手。

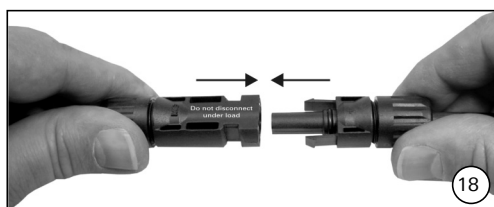
In both cases:

The tightening torque must be appropriate for the solar cables used. Typical values are between 3,4 Nm and 3,5 Nm¹⁾.

¹⁾ We recommend to calibrate the torque wrench before assembly.

在无安全锁扣PV-SSH4的情况下
插拔电缆连接器

Plugging and unplugging the cable coupler without safety lock clip PV-SSH4

**插入**

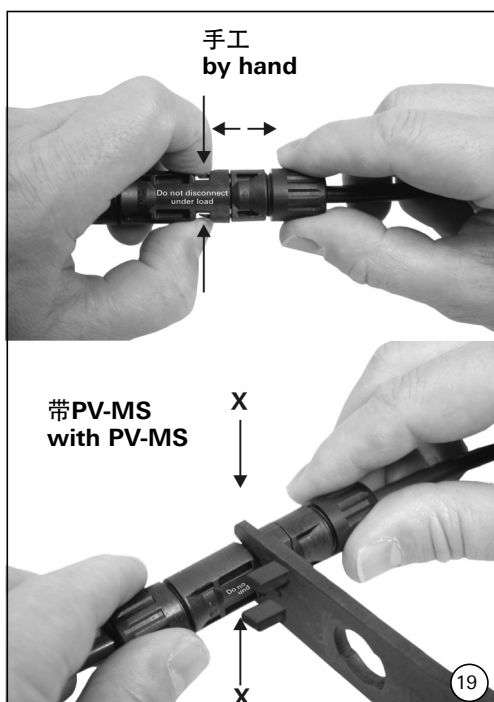
(ill. 18)

把电缆插头插接在一起，发出滴答声说明插合到位。拉电缆接头检查接头是否完全接好。

Plugging

(ill. 18)

Plug the parts of the cable coupler together until they click in place. Check that they have engaged properly by pulling on the cable coupler.

**拔出**

(ill. 19)

拔出接头，用手或者工具PV-MS压锁扣同时拉出，电缆连接器就会被拨开。

Unplugging

(ill. 19)

To disconnect the contacts, press the latches (X) together either by hand or with the tool PV-MS and pull the halves of the cable coupler apart.



有安全锁扣PV-SSH4的情况下插拔电缆连接器

插入

(ill. 20)

把电缆插头插接在一起，发出滴答声说明插合到位。拉线缆接头检查接头是否完全接好。

拔出

只能用工具PV-MS来断开电缆连接器间的连接。用工具PV-MS压锁扣同时拉出，电缆连接器就会被拔出。

电缆状态

力度不可以使塑料件的密封部分产生明显形变。
参考电缆线生产商的最小弯曲半径说明。

Plugging and unplugging the cable coupler with safety lock clip PV-SSH4

Plugging

(ill. 20)

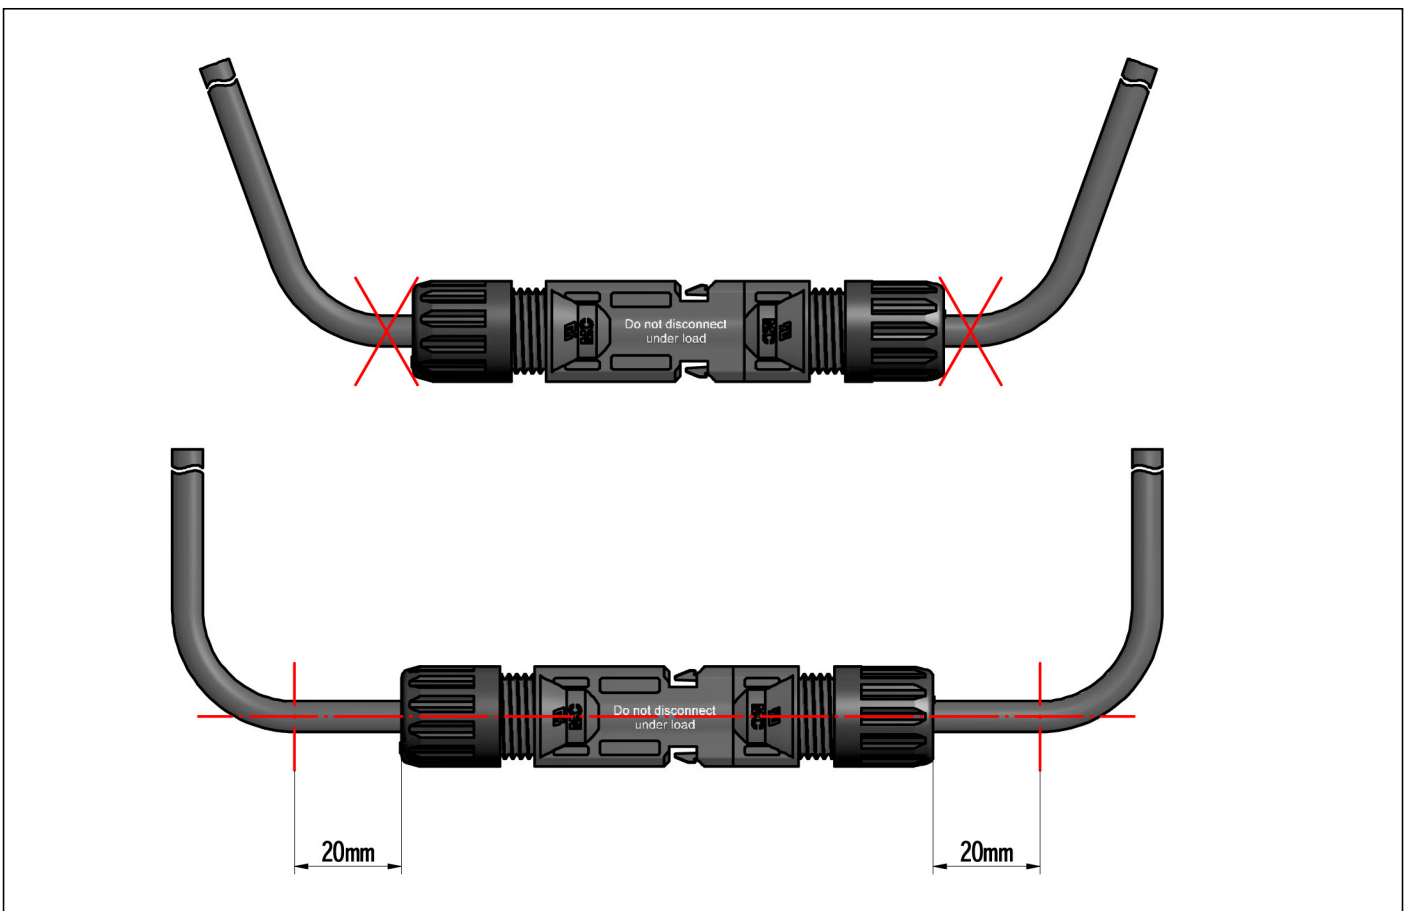
Plug the parts of the cable coupler together until they click in place. Check that they have engaged properly by pulling on the cable coupler.

Unplugging

The cable coupler can be disconnected only with the tool PV-MS. Press the latches (X) together with the tool PV-MS and pull the halves of the coupler apart.

Cable routing

The forces must not create a visible deformation in the sealing portion of the insulation. Refer to cable manufacturers specification for minimum bending radius.



技术参数

Technical data

类别名称	Type designation	MC4
连接器系统	Connector system	Ø 4 mm
额定电压	Rated voltage	1000 V / 1500 V DC (IEC) ^{1) 2)} 600 V / 1000 V DC (UL) ³⁾
额定电流 IEC (90 °C)	Rated current IEC (90 °C)	17 A (1,5 mm²) 22,5 A (2,5 mm², 14 AWG) 30 A (4 mm², 6 mm², 10 AWG) 43 A (10 mm², 8 AWG)
额定电流 IEC (85 °C)	Rated current IEC (85 °C)	17 A (1,5 mm²) 22,4 A (2,5 mm², 14 AWG) 39 A (4 mm², 12 AWG) 45 A (6 mm², 10 AWG)
额定浪涌电压	Rated surge voltage	12 kV (1000 V DC (IEC)) 16 kV (1500 V DC (IEC))
环境温度范围	Ambient temperature range	-40 °C...+90 °C
温度上限	Upper limiting temperature	105 °C (IEC)
防护等级, 已插入 未插入	Degree of protection, mated unmated	IP65 / IP68 (1 m/1 h) IP2X
过压类别 / 污染等级	Overvoltage category / Pollution degree	CATIII/3
连接器的接触电阻	Contact resistance of plug connectors	0,35 mΩ
连接器极性	Polarity of the connectors	插座 / Socket = Plus / positive 插头 / Plug = Minus / negative
锁紧系统	Locking system	Snap-in
安全等级 (IEC)	Safety class (IEC)	1000 V DC:II 1500 V DC:0
连接系统	Contact system	MULTILAM
接线方式	Type of termination	压接 / Crimping
警告	Warning	在负载的情况下不允许断开 Do not disconnect under load
接触材料	Contact material	铜、镀锡 / Copper, tin plated
绝缘材料	Insulation material	PC/PA
阻燃等级	Flame class	UL94-V0
盐雾试验, 严酷等级6	Salt mist spray test, degree of severity 6	IEC 60068-2-52
耐氨性 (参考DLG)	Ammonia resistance (according to DLG)	1500 h, 70 °C / 70 % RH, 750 ppm
根据EN 50521获得TÜV-Rheinland认证。	TÜV-Rheinland certified according to EN 50521	R60028286
根据UL 6703获得UL认证。	UL certified according to UL 6703	E343181
根据UL 6703获得CSA认证。	CSA certified according to UL 6703	250725

¹⁾ 1500 V 2PFG2330: 仅应用于专业人员安装的环境。 / Only for use in PV-systems with restricted access locations

²⁾	额定电压 [V] DC Rated voltage [V] DC	适用电线 Suitable wires	导线截面积 [mm²] Cable cross section [mm²]
	1000	仅可使用获得2PFG 1169/07.08认证的1000 V电线 Only with valid 1000 V according to 2PFG 1169/07.08 approved wires	1,5 / 2,5 / 4 / 6 / 10
	1500	仅可使用获得2PFG 1990/05.12认证的1500 V电线 Only with valid 1500 V according to 2PFG 1990/05.12 approved wires	1,5 / 2,5 / 4 / 6 / 10
³⁾	额定电压 [V] DC Rated voltage [V] DC	适用电线 Suitable wires	线缆直径 [mm²] Cable diameter [mm²]
	1000	PV Wire	6,05 - 8,2 (14 / 12 / 10 AWG) 6,05 - 8,9 (8 AWG)
	600	USE 2 cable	3 - 9 (10 / 12 / 14 AWG)

生产厂家/Producer:
Multi-Contact AG
Stockbrunnrain 8
CH – 4123 Allschwil
Tel. +41/61/306 55 55
Fax +41/61/306 55 56
mail basel@multi-contact.com
www.multi-contact.com