




ST-180Q-12Y

High Efficiency Monocrystalline PV Module

- Nominal 12V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Designed to withstand high wind pressures, hail and heavy snow.
- Quality aesthetic appearance.

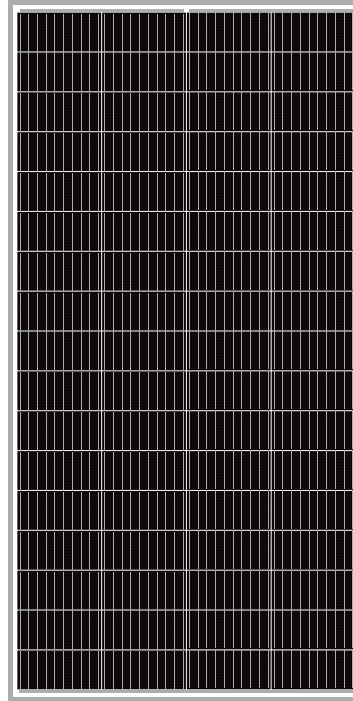

68 CELL
MONOCRYSTALLINE MODULE

180W
POWER OUTPUT

22.00%
MODULE EFFICIENCY

5%
POSITIVE TOLERANCE



High Efficiency

Module Efficiency improved through advanced cell technology and manufacturing capabilities



High PID Resistance


Advanced cell technology and qualified materials lead to high resistance to PID



Withstands Harsh Environment

High PID resistance, 5400 Pa positive load, 2400 Pa negative load, Salt mist (IEC 61701)

Performance Warranty

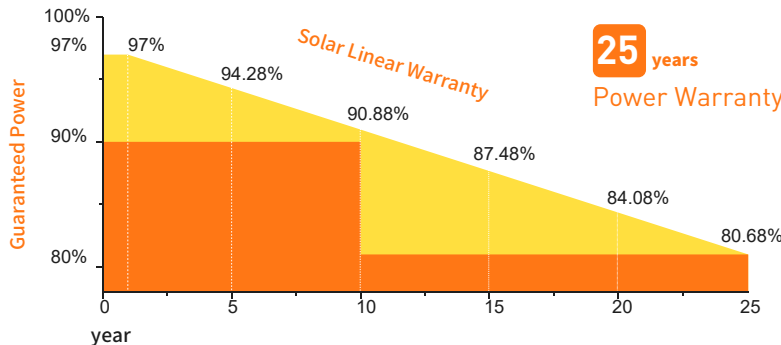

10 years
Product Warranty

25 years
Power Warranty

Wind Load/Snow Load:
2400pa/5400pa

Positive Power Tolerance:
0~+5W


Warranty Information:
10 Years Product Workmanship



Electrical Characteristics

Maximum power (Pmax)	180W
Voltage at Pmax (Vmp)	19.59V
Current at Pmax (Imp)	9.19A
Open-circuit voltage (Voc)	22.99V
Short-circuit current (Isc)	9.79A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/°C
Temperature coefficient of power	-(0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	1000V DC
Power tolerance	± 5%




*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C
*NOCT: Nominal operating cell temperature (the data is only for reference)

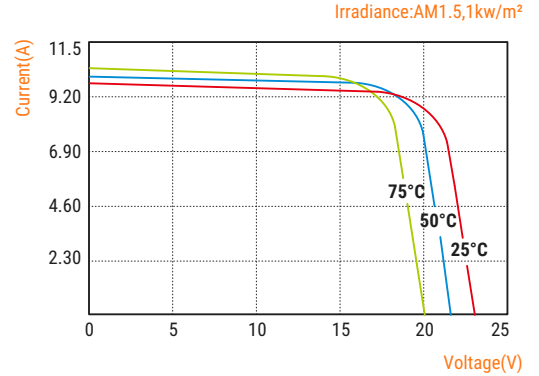


I-V Curves (STC)

Specifications

Cells	Monocrystalline silicon solar cell
No. of cells and connections	68(4X17)
Module dimension	54.72in.x27.76in.x1.38in.[1390mmx705mmx35mm]
Weight	23.90lbs[10.84kg]
Packing information(Carton)	56.5in.x29.53in.x2.76in.[1365mmx750mmx70mm]/(1pc/ctn)

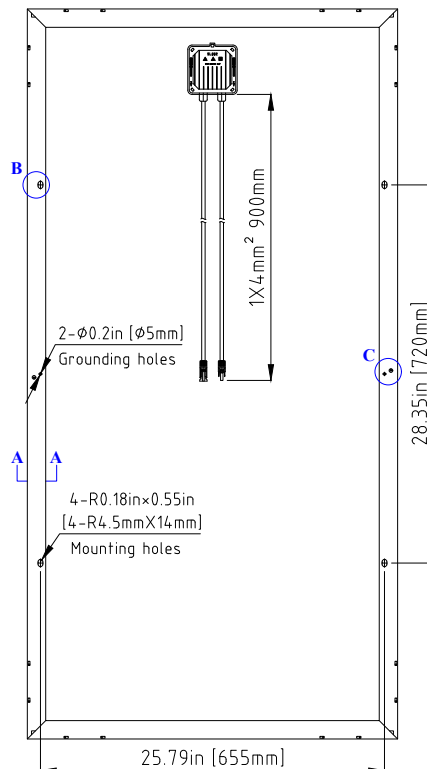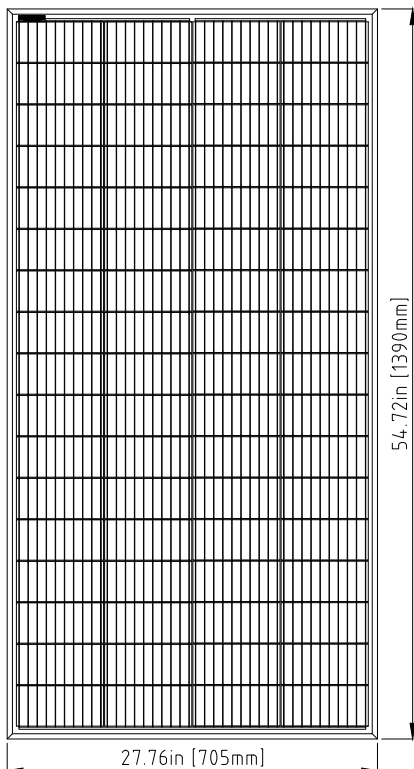

**Junction Box
Top View (Lid Open)**



Section A-A